
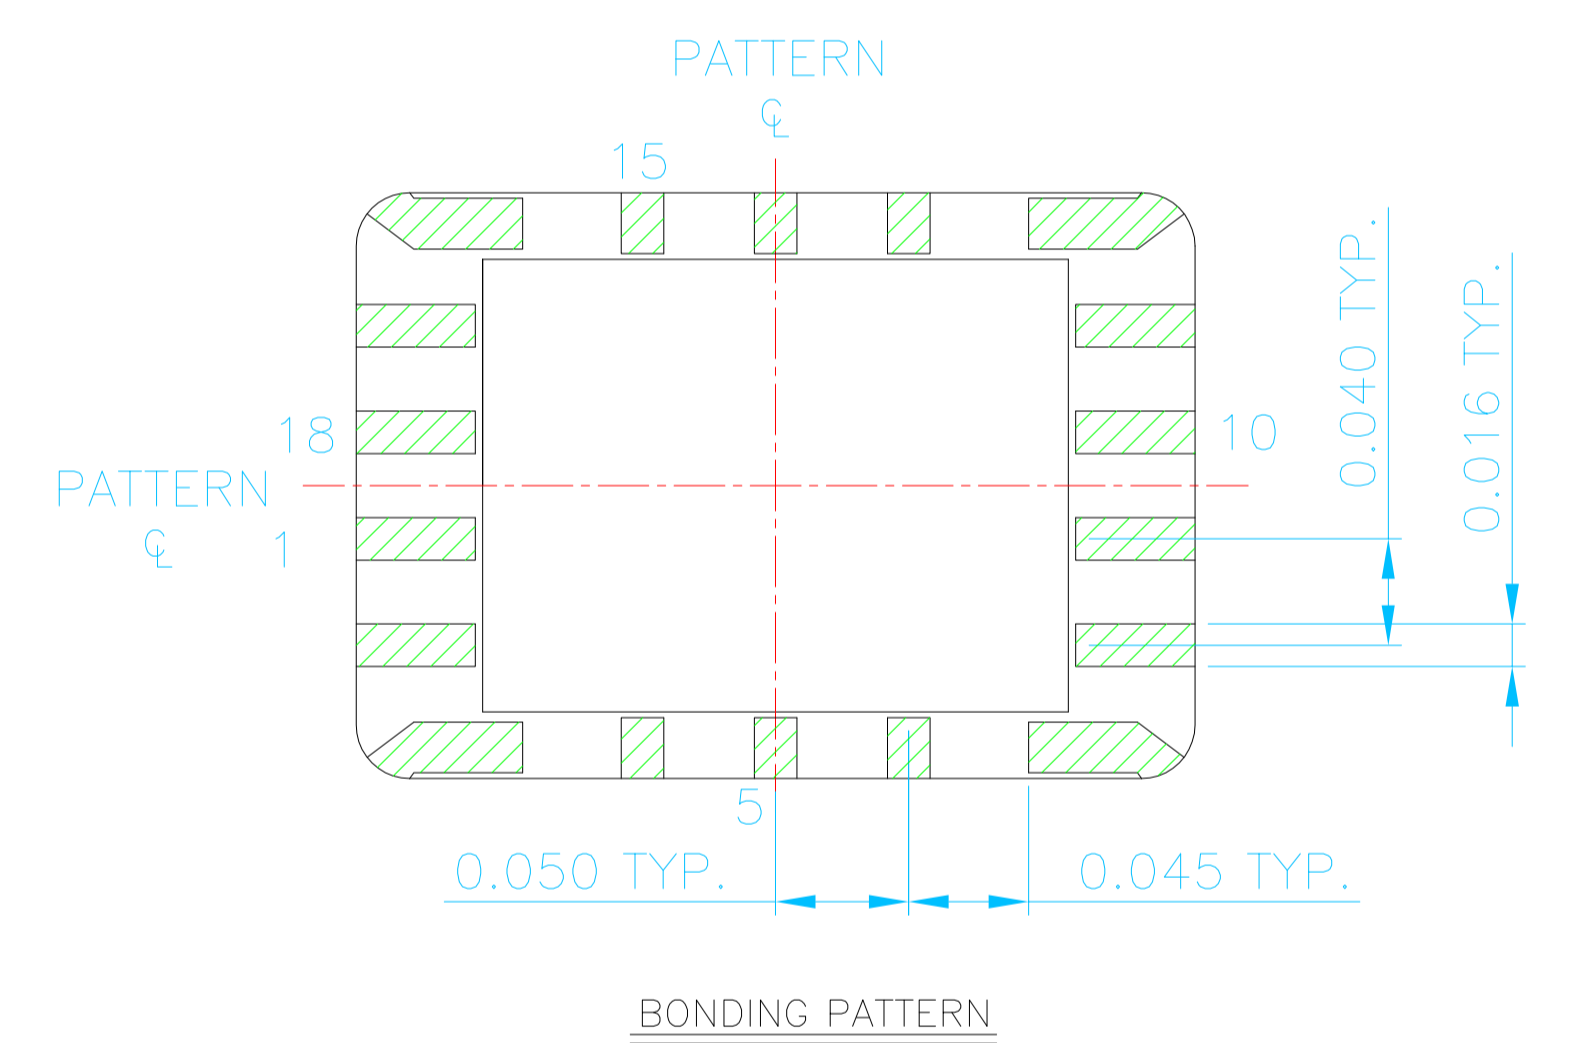


PART NO.	INDEX MARK	LEAD TIED DOWN
01	0	MIL
02	1	NO.1 ONLY
03	8	NO.8 ONLY
04	10	NO.10 ONLY
05	5	NO.5 ONLY
06	14	NO.14 ONLY

VENDOR'S OPTION

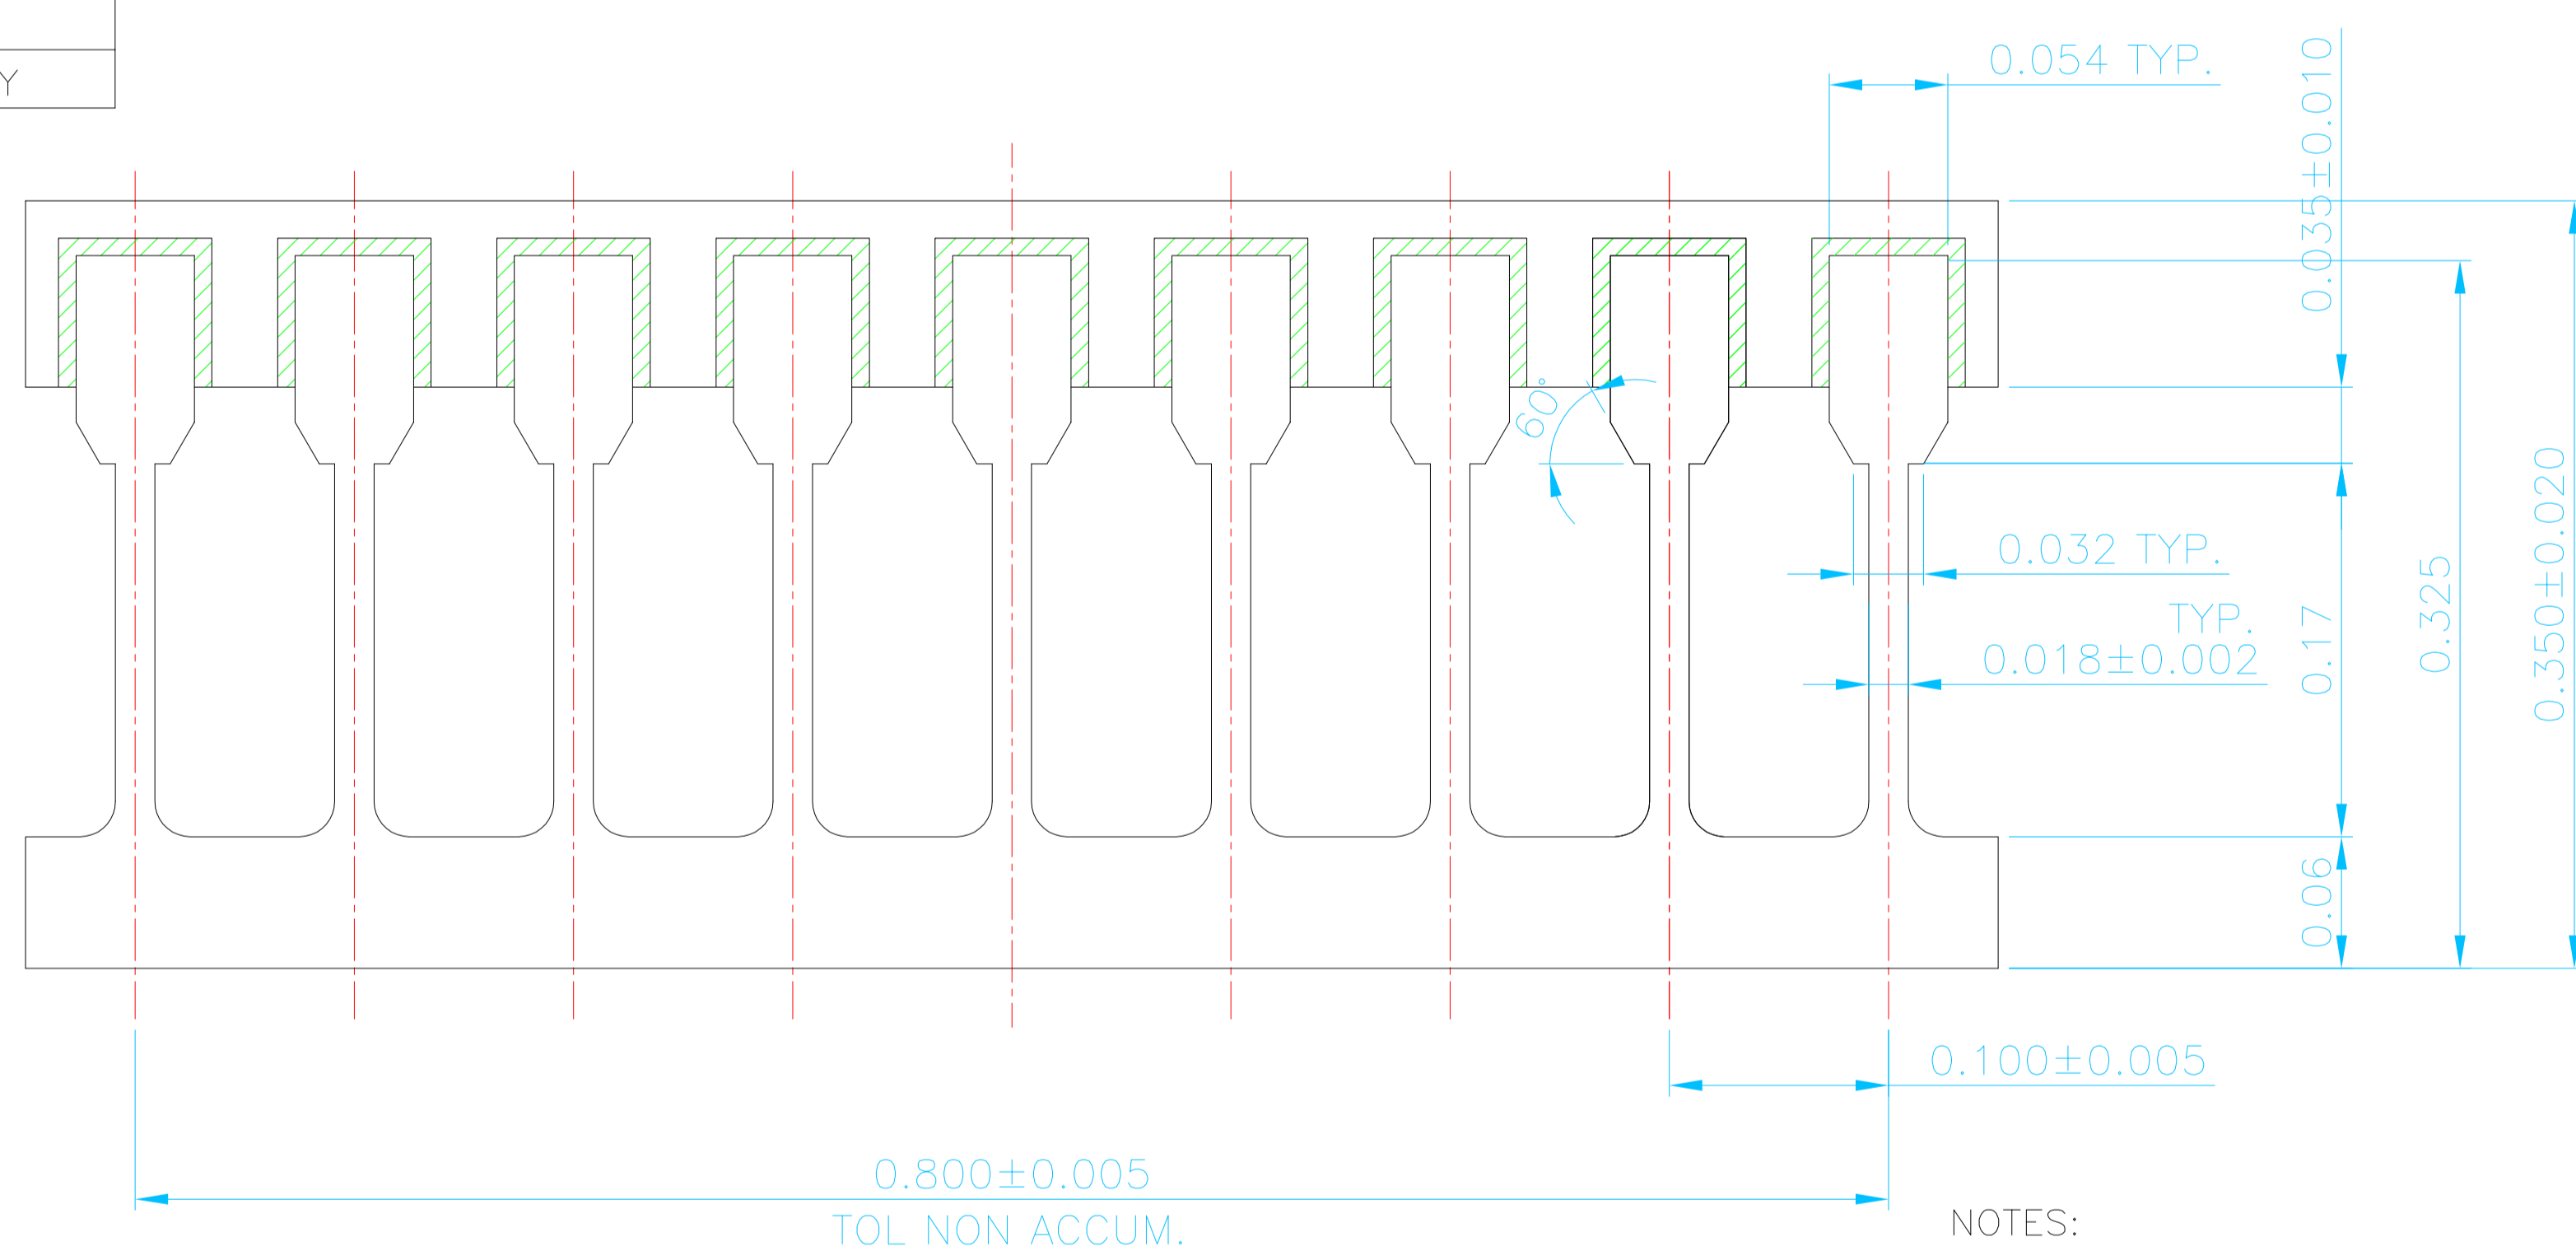

- NOTES:
1. PLATING THICKNESS TO BE PER CUSTOMER'S SPECIFICATION.
  2. SEAL AREA TO BE METALLIZED.
  3. DIE ATTACH TO BE METALLIZED.
  4. LEAD RESISTANCE : 0.20 OHMS MAX.

單位:Inch

宜特科技股 有限公司  
Integrated Service Technology Inc.

TITLE: S/B-18(KD-77309-E-1-JMI) GENERAL TOLERANCE

CERTIFIED FOR CONSTRUCTION	DWG.	DESIGN	CHK.	APPR.
BY	BY			
DATE	DATE			
LCYCIC:	PROJ. NO.	DWG. NO.	REV.	
KPEC:		CSB-018-31		
FILE NAME:	SCALE:	SHEET		