


THIS METALLIZED AREA IS CONNECTED TO DIE ATTACH PAD



0.050 R NOTCH

INDEX MARK SEE TABLE

PART NO.	INDEX MARK	LEAD TED DOWN
01		NIL
02		NO.12 ONLY
03		NO. 1 ONLY
04		NO.21 ONLY
05		NO.24 ONLY

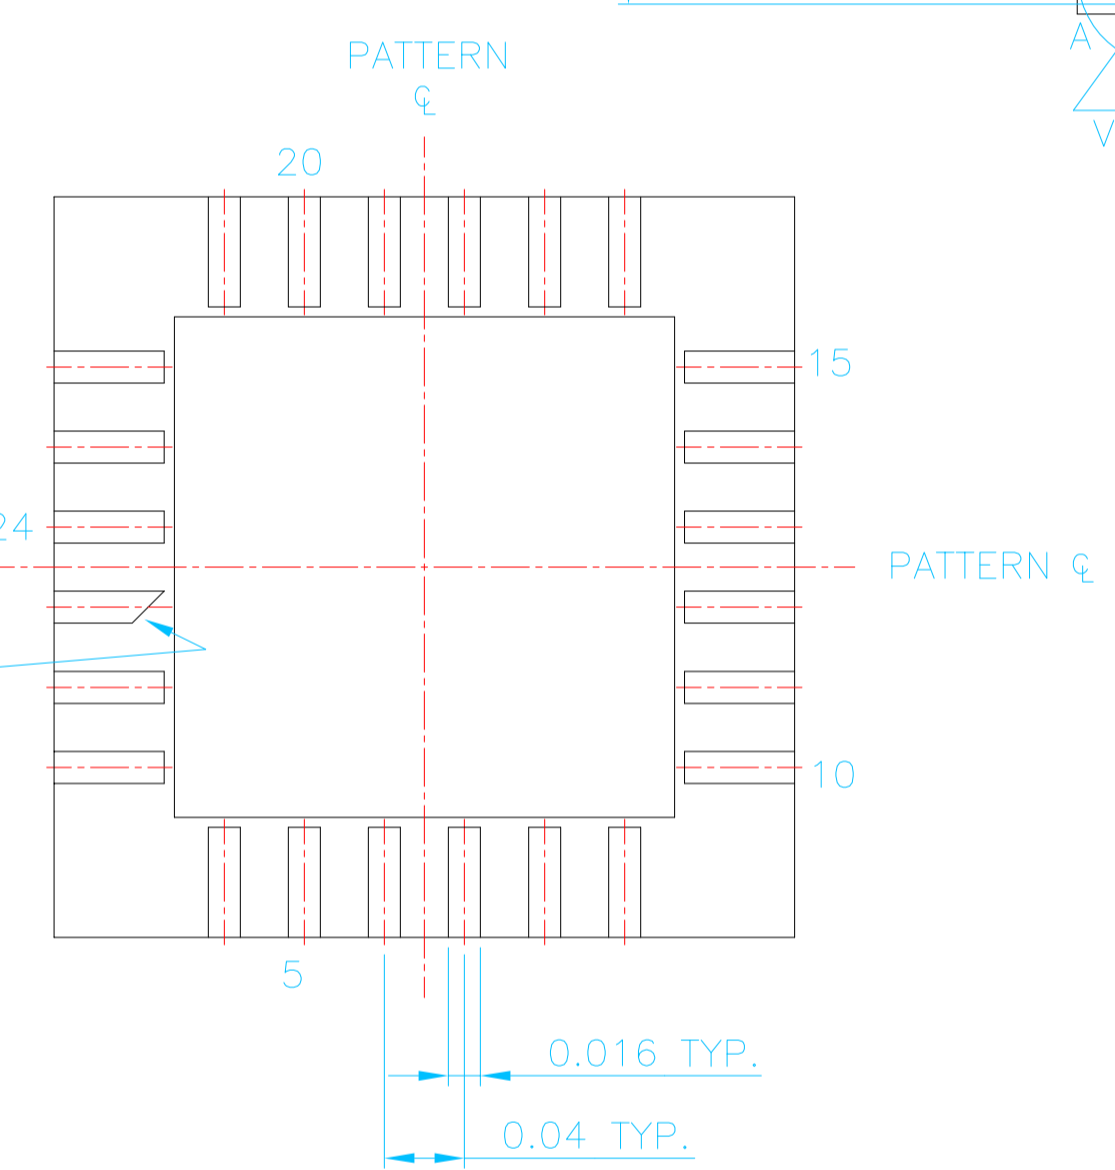

- NOTES:
1. PLATING THICKNESS TO BE PER CUSTOMER'S SPECIFICATION.
 2. SEAL AREA TO BE METALLIZED.
 3. DIE ATTACH AREA TO BE METALLIZED.
 4. LEAD RESISTANCE: 0.30 OHM MAX.

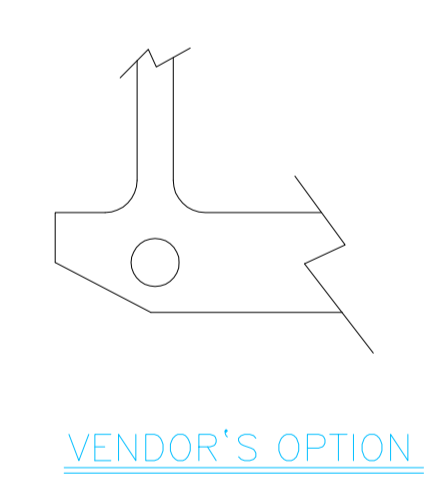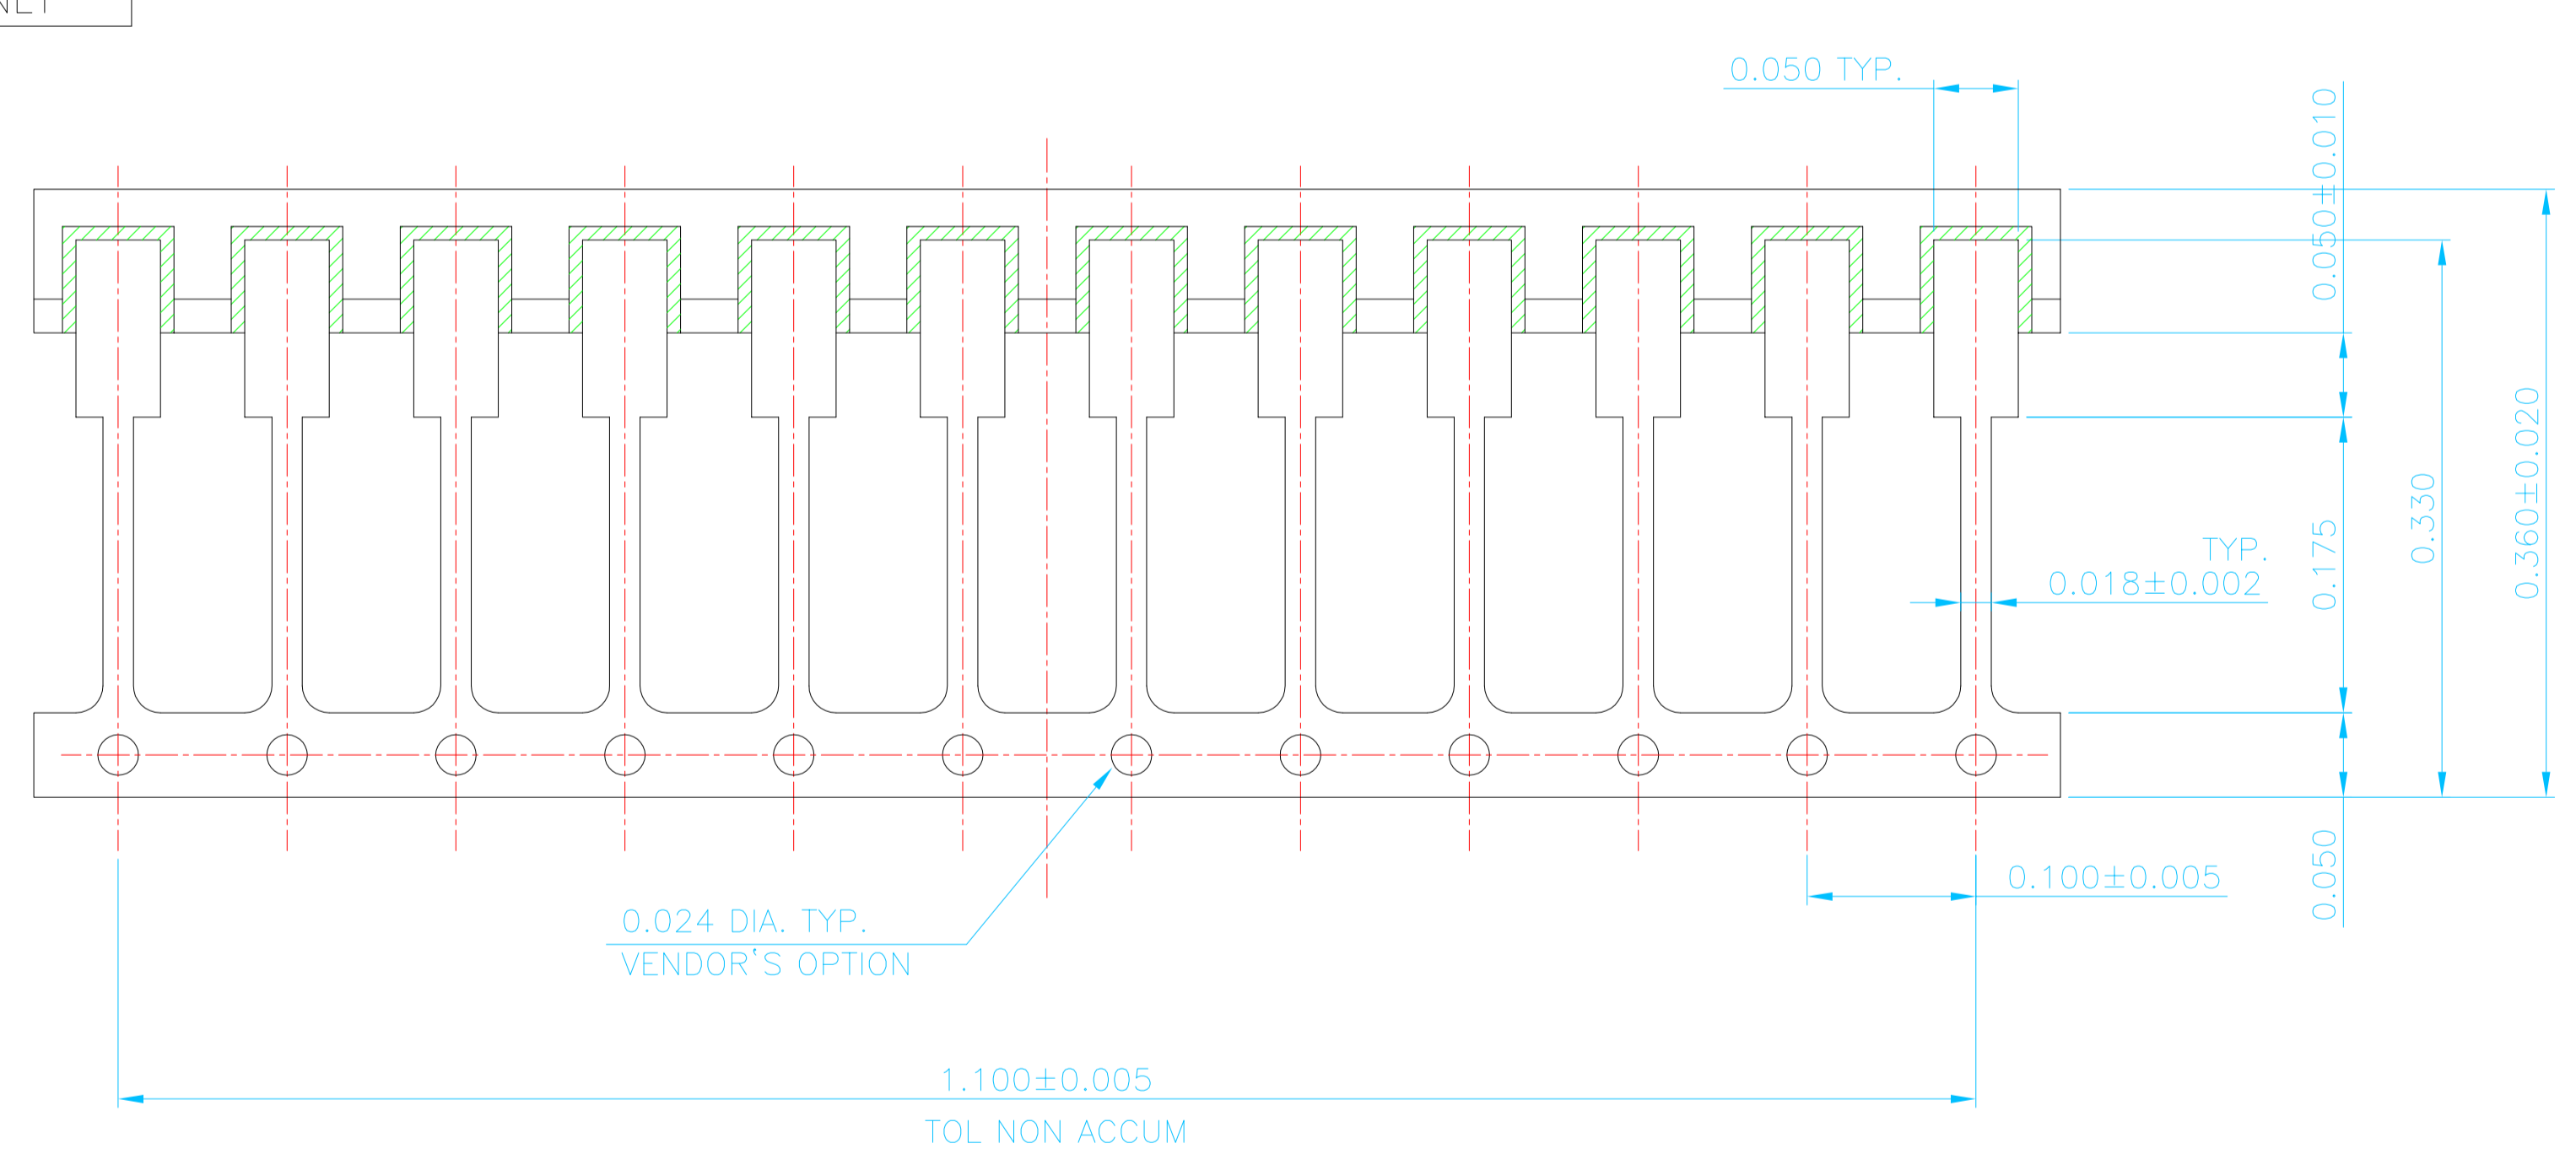

宜特科技股份有限公司
Integrated Service Technology Inc.

TITLE		S/B-24(KD-SB9F83)		GENERAL TOLERANCE	
CERTIFIED FOR CONSTRUCTION	DWG.	DESIGN	CHK.	APPR.	
BY	BY				
DATE	DATE				
LCYCIC:	PROJ. NO.	DWG. NO.	REV.		
KPEC:		CSB-024-61			
FILE NAME:	SCALE:	SHEET			

單位:Inch